

EVACUATED TUBE | Gravity system



Installations
DHW
domestic




DHW



Warm
climates


STRUCTURE

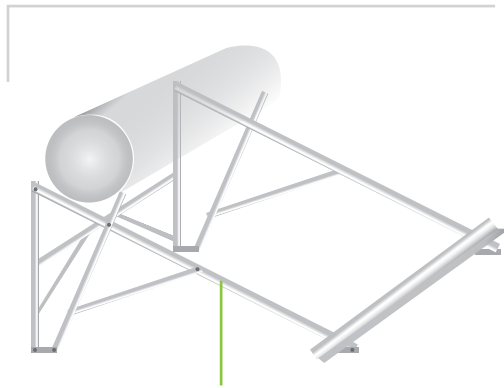

GALVANIZED STEEL 3 mm



LOW PRESSURE EVACUATED TUBE SYSTEMS

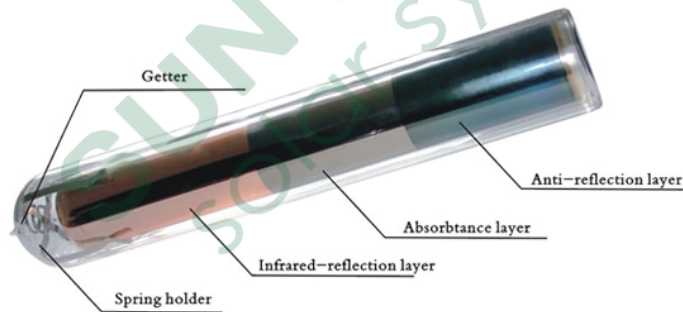

VACUUM TUBE SYSTEMS

	VT 240	VT 300
MODEL	20 tubes	25 tubes
Units capacity	240 liter	300 liter
Gross Area	3.99 m ²	4.99 m ²
Material Outer Tank	Painted steel 1mm	
Material Inner Tank	G1 90 3mm	
Max. pressure	Mpa 0,05	
Standing heat loss	1m= 0.015°C	
Isolation	Polyurethane 55 mm 45 kg/m	
Primary heating	max . 80 % / min . 60 %	
Primary Flow rate	max . 60 % / min . 40 %	
Electrical heater	Optional (230 V, 50 HZ / 1500 W)	
Energy efficiency	First Class	



**It is forbidden to use the pressure pump .
Please keep it on gravity.**

The system should be always full of water